PENTAX

SLR Digital Camera

K-7

PC Connect

HI-SPEED CERTIFIED USB

SILKYPIX® The Excellent digital development technology

SDHC

DNG™

CERTIFIED FOR Windows Vista®

Mac

Universal

HDMI™ HIGH-DEFINITION MULTIMEDIA INTERFACE

Thank you for purchasing the PENTAX K-7 Digital Camera.
Refer to the separately supplied “Operating Manual” for further explanation of functions and advanced operations of the camera.

Regarding copyrights

Images taken using the K-7 that are for anything other than personal enjoyment cannot be used without permission according to the rights as specified in the Copyright Act. Please take care, as there are cases where limitations are placed on taking pictures even for personal enjoyment during demonstrations, performances or of items on display. Images taken with the purpose of obtaining copyrights also cannot be used outside the scope of use of the copyright as laid out in the Copyright Act, and care should be taken here also.

Regarding trademarks

PENTAX, K-7 and smc PENTAX are trademarks of HOYA CORPORATION.
PENTAX Digital Camera Utility and SDM are trademarks of HOYA CORPORATION.
Microsoft and Windows are registered trademarks of Microsoft Corporation in the United States and other countries. Windows Vista is either a registered trademark or trademark of Microsoft Corporation in the United States and/or other countries.
Macintosh and Mac OS are trademarks of Apple Inc., registered in the U.S. and other countries.

SDHC logo is a trademark.

This product includes DNG technology under license by Adobe Systems Incorporated.

The DNG logo is either registered trademarks or trademarks of Adobe Systems Incorporated in the United States and/or other countries.

HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC.
All other brands or product names are trademarks or registered trademarks of their respective companies.

Disclaimer

- HOYA is not responsible for any damages resulting from the direct or indirect use of this software or repercussive damages, damage to data, programs or other intangible property, loss of profit or anticipated profit, or dispute with a third party resulting from the use of this software.
- The specifications of this software are subject to change without notice.

Table of content

Connecting the Camera to Your Computer 4

Using Captured Images on a Computer 4
Saving Images on Your Computer 5
Using the Provided Software 6

Connecting the Camera to Your Computer

Using Captured Images on a Computer

The captured still pictures and movies can be transferred to a computer by connecting the K-7 using a USB cable and can be managed using the provided software.
We recommend the following system requirements to connect your camera to a computer or to use the software “PENTAX Digital Camera Utility 4” included in the provided CD-ROM (S-SW90).

Windows

OS	Computer with Windows XP (Home Edition/Professional/x64 Edition) SP2 or later, or Windows Vista preinstalled * With Windows 2000, you can only transfer images from your camera using a USB cable.
CPU	Pentium 4 or higher (Intel Core Processor or higher recommended)
RAM	1.0 GB or more (2.0 GB or more recommended. For Windows Vista, 3.0 GB or more recommended)
Free Disk Space	1.0 GB or more (2.0 GB or more recommended)
Monitor	1280×1024 pixels or more with 24-bit full color (approximately 16.77 million colors)
Others	USB 2.0 port must be standard equipment

Macintosh

OS	Macintosh with Mac OS X 10.3.9, 10.4, or 10.5 preinstalled * With Mac OS X 10.2, you can only transfer images from your camera using a USB cable.
CPU	PowerPC G5 or higher (Dual CPU or Intel Core processor recommended. Universal Binary format)
RAM	1.0 GB or more (2.0 GB or more recommended)
Free Disk Space	1.0 GB or more (2.0 GB or more recommended)
Monitor	1280×1024 pixels or more with 24-bit full color (approximately 16.77 million colors)
Others	USB 2.0 port must be standard equipment, QuickTime 7.0 or later

Saving Images on Your Computer

Setting USB Connection Mode

Set the USB Connection mode to [MSC] (Mass storage class).



Saving Images by Connecting Your Camera and Your Computer

1 Turn your computer on.

2 Turn off your camera and use the provided USB cable to connect your camera and your computer.

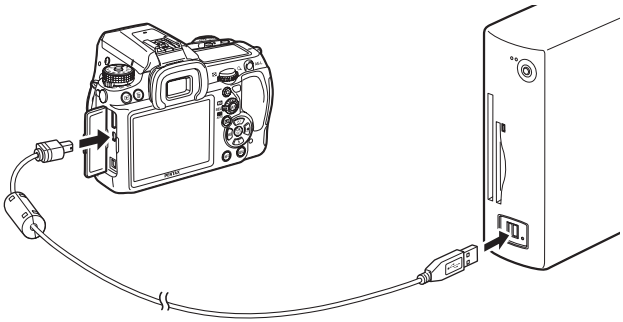

3 Turn the camera on.

The camera is recognized as a [Removable Disk] in [My Computer] for Windows.

For Macintosh, an icon for the SD Memory Card appears on the desktop.

- If the [Removable Disk Drive] dialog appears when the camera is turned on, select [Open folder to view files using Windows Explorer] and click the OK button.
- When using Windows XP, if the SD Memory Card has a volume label, the volume label name appears instead of [Removable Disk]. A new unformatted SD Memory Card may show the manufacturer name or model number.

4 Save the captured images to your computer.

Drag and drop the image file in your camera or the folder containing the image files to the hard disk of your computer or the desktop.

5 Disconnect your camera from your computer.

Using the Provided Software

"PENTAX Digital Camera Utility 4" is included in the provided CD-ROM (S-SW90). Using the PENTAX Digital Camera Utility 4, you can manage images saved on your computer and develop (process) and adjust the color of RAW files taken with the K-7.

Compatible file formats: .bmp (BMP)/.jpg (JPEG)/.pef (files recorded in PENTAX's exclusive digital-camera RAW format)/.pct (PICT)/.png (PNG)/.tif (TIFF)/ .dng (DNG)

Installing the Software

You can install the software from the provided CD-ROM.
When multiple accounts have been setup on your computer, log on with an account that has administrative rights before installing the software.

1 Turn your computer on.

Close any other software that is open.

2 Place the CD-ROM (S-SW90) into the CD-ROM drive on your computer.

The [PENTAX Software Installer] screen appears.

If the [PENTAX Software Installer] screen does not appear

- **For Windows**
  1) Click [My Computer] from the Start menu.
  2) Double-click the [CD-ROM drive (S-SW90)] icon.
  3) Double-click the [Setup.exe] icon.
- **For Macintosh**
  1) Double-click the CD-ROM (S-SW90) icon on the desktop.
  2) Double-click the [PENTAX Installer] icon.

3 Click [PENTAX Digital Camera Utility 4].

For Windows, proceed to step 4.

For Macintosh, follow the instructions on the screen to perform subsequent steps.

4 Select the desired language in the [Choose Setup Language] screen and click [OK].

5 When the [InstallShield Wizard] screen appears in the selected language, click the [Next] button.

Follow the instructions on the screen to perform subsequent steps.


PENTAX Digital Camera Utility 4 - InstallShield Wizard
Welcome to the InstallShield Wizard for PENTAX Digital Camera Utility 4
The InstallShield(R) Wizard will install PENTAX Digital Camera Utility 4 on your computer. To continue, click Next.
WARNING: This program is protected by copyright law and international treaties.
< Back
Next >
Cancel

The PENTAX Digital Camera Utility 4 Screen

When PENTAX Digital Camera Utility 4 is launched, the following screen (browser) appears.

- The screenshots used in this explanation are for Windows.

The Browser tab set (default setting)

You can perform the file management functions such as viewing and managing the images.

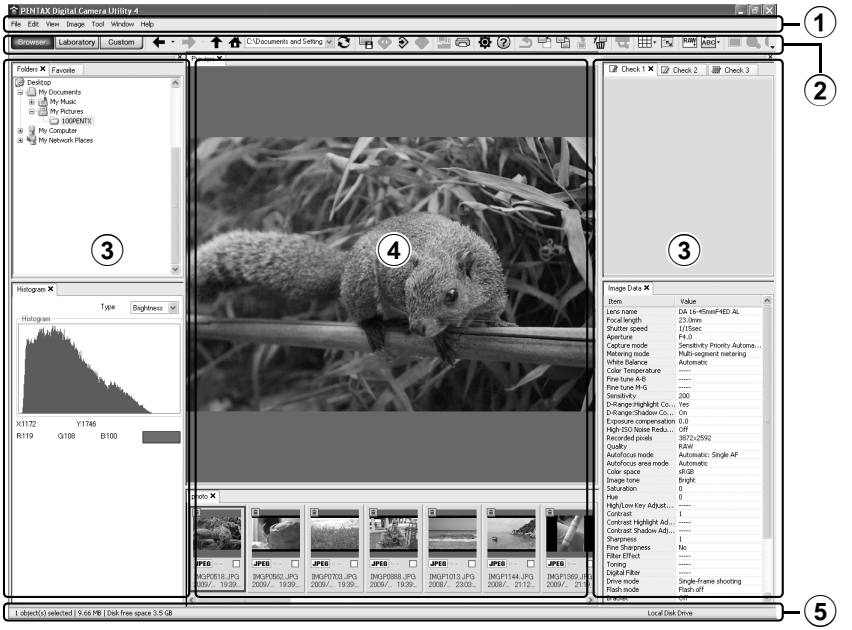

①Menu Bar

This executes functions or sets various settings.
For Macintosh, the Menu bar appears at the top of the desktop.

②Tool Bar

Frequently used functions are provided as Tool bar buttons.

③Control Panel

The shooting information and settings for the selected image appear in this panel. You can switch the panel tab sets by pressing the Browser, Laboratory and Custom buttons on the Tool bar.

④File Display Pane

File list or the images in the selected folder appear here.

⑤Status Bar

Information on the selected item appears.

The Laboratory tab set (default setting)

The control panel for adjusting the image appears here.

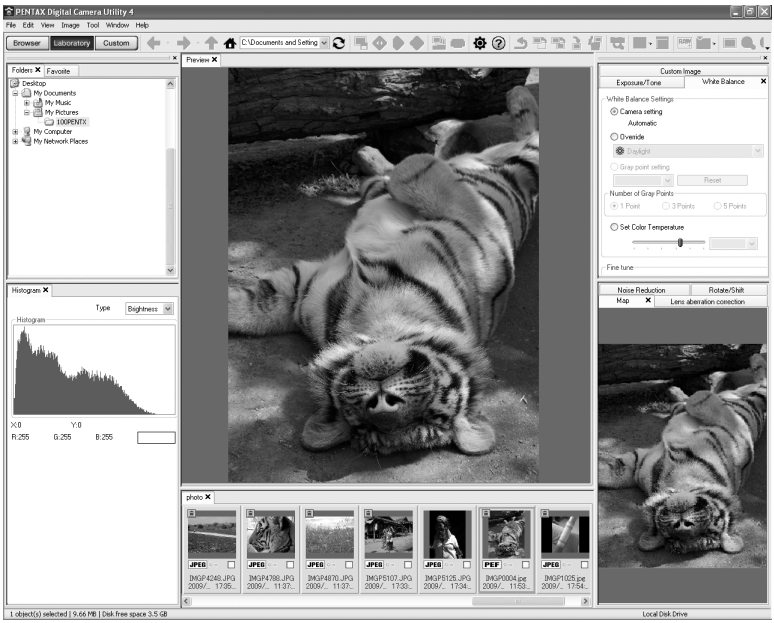

The Custom tab set (default setting)

The screen display can be customized here. The [Custom] tab sets enable you to customize whether to show/hide the various tab pages in accordance with your needs. With the default settings, all control panels are displayed.

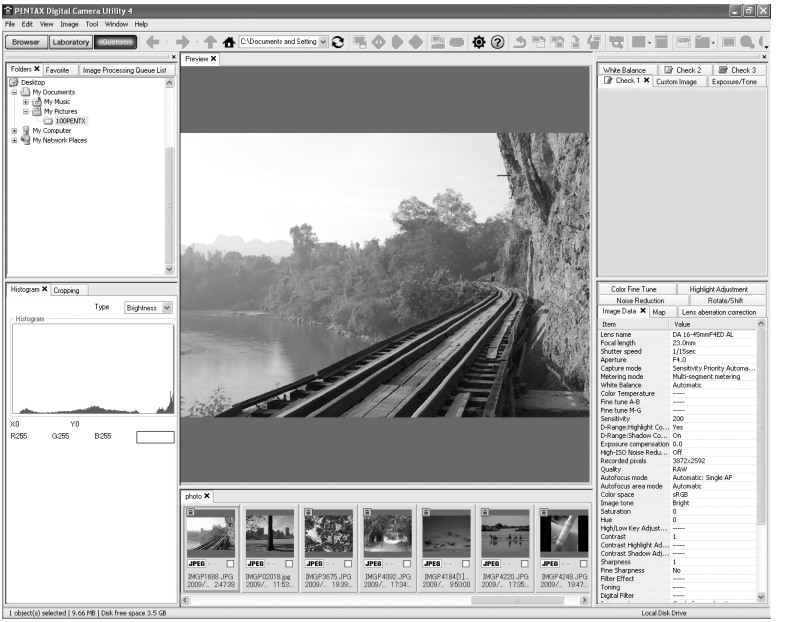

Viewing Detailed Information on the Software

Refer to Help for details on using each software program.

Press the ? button on the Tool bar.

Or, select [PENTAX Digital Camera Utility Help] from the [Help] menu.


PENTAX Digital Camera Utility
Hide
Back
Print
Options
Contents
Index
Search
Introduction
1 New Features in PENTAX Digital
Operation Flow
Main Window
File Display Pane
Control Panels
Main Image View Window
Operating Images and Files
Slideshow and Printing
Settings
1 New Features in PENTAX Digital Camera Utility 4
This section introduces the new features of PENTAX Digital Camera Utility 4.
The changes in the new software from the previous PENTAX PHOTO Browser 3 and PENTAX PHOTO Laboratory 3 software programs are summarized below.
Completely new user interface
• The functions previously provided by two software programs have

Regarding Product Registration

To better serve you, please take a moment to register your software.

Click [Product Registration] on the screen in step ❸ on page 7.

A world map for Internet Product Registration is displayed. If your computer is connected to the Internet, click the displayed country or region and then follow the instructions to register your software.



HOYA CORPORATION
PENTAX Imaging Systems Division

2-36-9, Maeno-cho, Itabashi-ku, Tokyo 174-8639, JAPAN
(http://www.pentax.jp)

PENTAX Europe GmbH (European Headquarters)
Julius-Vosseler-Strasse, 104, 22527 Hamburg, GERMANY
(HQ - http://www.pentaxeurope.com)
(Germany - http://www.pentax.de)
Hotline: 0180 5 736829 / 0180 5 PENTAX

Austria Hotline: 0820 820 255 (http://www.pentax.at)

PENTAX U.K. Limited
PENTAX House,
Heron Drive, Langley, Slough, Berks SL3 8PN, U.K.
(http://www.pentax.co.uk) Hotline: 0870 736 8299

PENTAX France S.A.S.
112 Quai de Bezons - BP 204, 95106 Argenteuil Cedex, FRANCE
(http://www.pentax.fr)
Hotline: 0826 103 163 (0,15€ la minute) Fax: 01 30 25 75 76
Email: http://www.pentax.fr/_fr/photo/contact.php?photo&contact

PENTAX Imaging Company
A Division of PENTAX of America, Inc.

(Headquarters)
600 12th Street, Suite 300 Golden, Colorado 80401, U.S.A.
(PENTAX Service Department)
12061 Tejon St. STE 600
Westminster, Colorado 80234, U.S.A.
(http://www.pentaximaging.com)

PENTAX Canada Inc.
1770 Argentia Road Mississauga, Ontario L5N 3S7, CANADA
(http://www.pentax.ca)

PENTAX Trading (SHANGHAI) Limited
23D, Jun Yao International Plaza, 789 Zhaojiabang Road,
Xu Hui District, Shanghai, 200032 CHINA
(http://www.pentax.com.cn)

Specifications and external dimensions are subject to change without notice.

AP028341/ENG

Copyright © HOYA CORPORATION 2009
FOM 01.05.2009 Printed in Europe